

Degrading Data to Save the Planet

Aviad Zuck

Technion – Israel Institute of
Technology
aviadz@cs.technion.ac.il

Donald E. Porter

The University of North Carolina
at Chapel Hill
porter@cs.unc.edu

Dan Tsafirir

Technion – Israel Institute of
Technology
dan@cs.technion.ac.il

ABSTRACT

Storage capacity demand is projected to grow exponentially in the coming decade and so will its contribution to the overall carbon footprint of computing devices. In recent years, cloud providers and device vendors have substantially reduced their carbon impact through improved power consumption and product distribution. However, by 2030, the manufacturing of flash-based storage devices will account for 1.7% of carbon emissions in the world. Therefore, reducing production-related carbon emissions of storage is key to sustainability in computing devices.

We present Sustainability-Oriented Storage (SOS), a new host-device co-design for personal storage devices, which opportunistically improves storage sustainability by: (1) targeting widely-produced flash-based personal storage devices; (2) reducing hardware production through optimizing bit density in existing materials, up to 50%; and (3) exploiting an underutilized gap between the effective lifespan of personal devices and longer lifespan of their underlying flash.

SOS automatically stores low-priority files, occupying most personal storage capacities, on high-density flash memories, currently designated for nearline storage. To avoid data loss, low-priority files are allowed to slightly degrade in quality over time. Switching to high-density memories, which maximize production material utilization, reduces the overall carbon footprint of personal storage devices.

CCS CONCEPTS

• **Hardware** → **Impact on the environment.**

ACM Reference Format:

Aviad Zuck, Donald E. Porter, and Dan Tsafirir. 2023. Degrading Data to Save the Planet. In *Workshop on Hot Topics in Operating Systems*

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
HOTOS '23, June 22–24, 2023, Providence, RI, USA
© 2023 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 979-8-4007-0195-5/23/06...\$15.00

<https://doi.org/10.1145/3593856.3595896>

(*HOTOS '23*), June 22–24, 2023, Providence, RI, USA. ACM, New York, NY, USA, 9 pages. <https://doi.org/10.1145/3593856.3595896>

1 INTRODUCTION

The changes in Earth's climate pose an enormous challenge for all sectors of society. The environmental impact, or carbon footprint, of devices includes carbon emissions during a device's major lifecycle phases [1, 2]: (1) material procurement; (2) manufacturing; (3) product dissemination; (4) operational power consumption; and (5) eventual disposal. Specifically for computing devices, their permeation to every aspect of human life presents a challenge in creating more sustainable environments.

Computer system designers have worked diligently over the years to optimize performance, power-consumption, and costs of devices during operation. To wit, recent analyses show that power consumption during systems operational phase has significantly improved [3–5]. In addition, vendors have laboriously worked to make other phases of a device's lifecycle, such as packaging and material procurement, more sustainable [6, 7]. As a result, production-related emissions effectively account for most of the carbon footprint of modern devices and datacenters [3, 4, 8]. However, computing systems already optimize by minimizing hardware requirements. Thus, directly reducing systems environmental impact *without* producing less hardware poses a unique

In this work, we focus on storage and its contribution to the overall environmental impact of systems. We specifically target flash-based storage, because it comprises a significant portion of the total carbon footprint of computing systems. For example, flash storage alone is responsible for up to 12–31% of iPhone14's carbon footprint [9] and SSDs comprise 33–80% of a computer's carbon footprint [8]. At a higher level, flash is poised to soon become the dominant storage medium [10] as flash annual capacity production in 2021 reached a staggering ~765 Exabytes [11]. Based on a recent analysis [8], the associated flash production-related carbon emissions were ~122M metric tonnes of CO₂, equivalent to the average annual CO₂ emissions of 28M people [12]. By 2030, this figure will have reached the equivalent of over 150M people [10, 13], an exponential growth which must trigger development of new, more sustainable designs.

We identify an opportunity to improve the overall carbon footprint of flash-based personal storage devices (e.g., mobile). Our solution is derived from two observations. First,

most flash production is used for personal devices which are discarded (and never re-used) long before their on-board storage device is worn-out (§2). Second, the carbon footprint of flash production will heavily increase in the coming decade as flash density improvements are projected to significantly lag behind the increasing growth in demand (§3).

We propose Sustainability-Oriented Storage (SOS), a new design for leaner personal flash-based storage devices (§4). SOS combines several SSD management techniques and flash technologies to effectively increase device sustainability without hampering usability. Namely, we propose: (1) to shift all personal storage to low-endurance, denser memories for the same capacity; (2) to use a machine-based mechanism to automatically detect low-priority, read-dominant, error-tolerant files and place them on lossy memories; (3) to store most personal data (i.e., media files) using approximate storage techniques that slightly degrade data integrity while retaining sufficient quality; and (4) to introduce capacity variance by gracefully re-using, and finally retiring, worn-out blocks.

Solutions using extremely dense memories have recently become commercially viable for nearline storage workloads [14]. Still, personal storage devices use less dense flash memories [15, 16]. We propose a design that switches personal storage devices to denser memories, which enable up to 50% more bits for the same amount of cells. By using denser flash memories, SOS straightforwardly optimizes material utilization, which proportionally reduces the associated carbon footprint for the same storage capacity.

This optimization utilizes an existing gap between the expected lifetime of personal computing devices and the larger resilience of their underlying flash devices. The gap is sufficiently large as to be utilized for increasing device sustainability. The design of SOS satisfies users needs (e.g., media consumption) on personal devices by selectively degrading data without prematurely wearing out low-endurance flash before the encasing device is discarded.

The design of SOS follows recently advocated directions for more sustainable systems [3]. Adhering to sustainability-oriented design principles means that systems designers must revise OS mechanisms and policies, which are currently optimized to other goals. SOS is one of several such first steps necessary to improve the sustainability of future systems.

2 MOTIVATION

2.1 Background

Flash stores data by electrically charging cells to predefined voltage thresholds. Corresponding logical values (e.g., 0/1) are determined by measuring and comparing each cell voltage to predetermined read reference voltages. Cells can store more bits using more precise, slower, programming process which differentiates between smaller voltage level ranges.

Reading and writing data is done at page granularity, typically 4-16 KB in size, by further charging cells in the relevant page. Rewriting a page requires a slow “erase” operation to uncharge cells. Erasures are performed in the granularity of *blocks*, groups of pages typically 256-4096 KB in size.

Cells can typically endure 1–5K program/erase cycles (PEC) before they wear out and can no longer reliably store data. To maintain minimal endurance levels, programmed data is encoded with error-correcting codes (ECC). SSD controllers regularly move data between blocks to ensure even wear levels and avoid data loss due to premature wear out.

2.2 Density and Flash Lifetime

Flash memories are produced from large ultra-thin silicon wafers using advanced lithography and etching processes. Several techniques have been successfully employed over the years to improve flash density.

First, lithography improvements dramatically reduced flash cell sizes from 300nm to around 15nm [17, 18]. Such *lateral* scaling allowed vendors to place more cells onto the same physical layout. Second, *logical* scaling of bit density has also increased. Single-level (SLC) and multi-level (MLC) cells, storing one and two bits per cell correspondingly, dominated the flash market a decade ago. Nowadays, most modern SSDs use denser three-level (TLC) and quad-level (QLC) cells [19] and vendors are expected to start producing penta-level cells (PLC) SSDs soon [14]. Third, in the past flash vendors used a 2D process to produce flash cells. However, in recent years vendors have widely adopted a 3D cell layer architecture [20] by *vertically* overlaying cells who share logic components.

The aforementioned density improvements significantly reduce flash prices by more efficiently utilizing raw flash memory wafers used in the production process and reducing flash media geometry. However, downsides include increased electrical disturbances due to smaller cell sizes, impacting reliability and endurance [21]. Increasing bit density has also reduced flash endurance from ~100K PEC for early-generation SLC memories to ~1K PEC for QLC memory [22].

Flash cell technology has reached its 2D geometric limitations. Consequently, layer stacking remains the main hardware scaling and cost reduction technique for flash. In recent years vendors have consistently increased the number of cell layers in flash packages to over 200 [17, 23]. This trend is expected to continue in the near future. For instance, Samsung projects achieving flash packages with over 1K layers [24] by 2030, effectively quadrupling current storage densities. Notably, although 3D flash architecture introduces some new reliability and endurance effects [25] it allows vendors to use larger-size cells, which are less susceptible to electrical disturbances and more enduring [26–28].

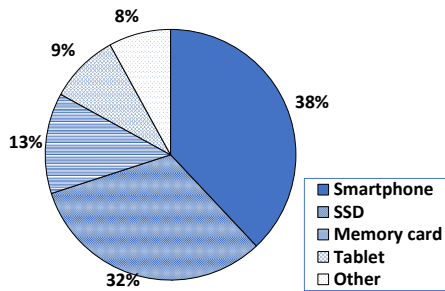


Figure 1: Flash market share by device type (2020).

2.3 Flash Utilization

Utilizing flash and flash-based storage devices for longer periods of time decreases demand for producing more flash in order to replace old media and devices. In this section we examine the factors affecting flash media utilization.

2.3.1 Flash Wear-out. The first factor we must consider is wear out of underlying flash packages. Most SSDs nowadays use either TLC or QLC flash, whose cells can endure a few thousand write cycles at most before being considered worn out. However, a closer look at lifetime warranties of flash-based storage devices shows that they are quite long for typical use cases with common lifetime warranties of five years [29, 30]. The literature shows that even under relatively stressful use in enterprise settings wear out of the underlying flash packages is a minor cause for drive failure [31, 32]. Memory cards common warranty periods are longer, typically 5–10 years [33, 34]. Mobile devices typical warranties are 1–2 years [35–37]. Consequently, mobile storage device lifetime typically outlasts the encasing mobile system [38]. These figures reflect vendor estimates that most end users and applications rarely re-write their entire devices frequently as to wear out the underlying flash media. Therefore, we conclude that **flash wear is a relatively minor factor in determining the effective lifetime of modern flash-based devices**. Thus, extending flash device lifetime to increase sustainability [2] is not beneficial.

2.3.2 Replacement rate. The second factor is the replacement rate of the encasing device, i.e. SSDs and embedded/mobile systems. To understand the implications and suitability for users needs we take a closer look at the flash storage market.

Figure 1 illustrates a recent overview [39] of the target devices for flash bit manufacturing. The figure shows that full-fledged SSDs (enterprise and consumer) comprise only 32% of the yearly flash bit production. Several studies in recent years have examined the failure rates of SSDs in enterprise settings [31, 32, 40] indicating low annual SSD failure rates of $\sim 1\%$. Although these numbers refer mostly to enterprise settings we assume that the failure rates of SSDs in less demanding consumer setups follow a similar trend.

We observe that a prominent use case for flash storage is *personal storage devices* (phone and tablet), comprising approximately half of the yearly flash bit production. Notably, the average smartphone use life is two to three years [41–43] and most phone warranties are even shorter (§2.3.1). However, mobile storage wear out analysis [38] shows that, under typical usage patterns, users only wear out a fraction (e.g., 5%) of the total wear phones can endure during their warranty period. Furthermore, most write-intensive apps are unlikely to be utilized for remotely long enough periods (e.g., playing Final Fantasy for 9 hours daily) as to prematurely wear out the underlying storage. The result is that currently used personal storage flash likely significantly outlasts the lifetime of its encasing device by an order of magnitude. Therefore, we conclude that **over half of all flash bits manufactured annually will be discarded and replaced over three times in the coming decade**.

2.3.3 Device Re-use. Flash costs are an important factor in SSDs. Consequently, re-use of flash packages can result in significant savings in production costs. Nevertheless, flash packages are almost never re-used for several reasons.

First, enterprise storage providers generally prefer to shred old devices for security and privacy concerns [44]. Second, the dominant target for flash production is mobile and consumer devices where flash chips are soldered onto the platform board [38]. Whenever a mobile device is discarded, the on-board flash is also discarded. Recycling mobile storage devices to reduce their carbon impact requires incorporating re-used flash packages of different models and age into the same device [8], which may prove technically challenging and a deterrent for both vendors and users.

Third, old mobile devices are typically not re-used [43] due to lack of demand and saving old phones for backup. Recycling flash packages requires an expansive infrastructure for collecting, de-soldering, formatting, quality-checking, disseminating, and re-soldering re-used packages. Establishing and maintaining such an infrastructure is likely a difficult and lengthy task. Finally, efforts to modularize mobile platforms have not been successful [45] or do not include modular storage components [46]. Thus, we conclude that **re-using flash packages will likely not become a sustainable alternative for flash production in the foreseeable future**.

Technology alternatives. SSDs are poised to slowly overtake HDDs as the main technology for non-archival storage in coming years. Furthermore, since flash production nowadays is geared towards mobile devices, flash is the dominant worldwide storage medium nowadays.

Multiple promising NVM technologies have been proposed as potential alternatives to flash [47, 48]. Unfortunately, none of the proposed technologies is currently commercially viable and scalable. Most prominently, the recent

implosion of Intel’s 3D XPoint Optane [49], the most mature of these alternatives, means that **flash will likely remain the dominant storage medium in the coming years.**

3 CARBON FOOTPRINT OF FLASH

Several works in the literature have analyzed the carbon emissions impact of flash manufacturing over the years. Boyd et al. [50] performed a comprehensive life-cycle analysis of NAND flash for earlier generation packages. More recently, several works performed an extensive review of the life-cycle impact of flash [5] and SSDs [8]. The results show that most related emissions are due to power consumption from non-renewable sources of energy (i.e., coal and gas) during the flash die manufacturing process. Unfortunately, constructing new renewable sources of energy is a lengthy process which can take years. East-Asian countries, the location of most global flash production [51], plan to switch only partially to renewable energy sources by the end of the decade [52–54]. We conclude that **flash production-related carbon emissions will continue to overshadow any gains in operational power consumption in the coming decade.**

Furthermore, projections indicate ~20-30% annual growth in the global data volume [55, 56]. Flash capacity production is projected to increase correspondingly [11] or even further [13, 57]. Flash vendors assert they will quadruple output capacity within a decade (§2.2) by more efficiently utilizing materials (due to vertical layer stacking). Therefore, improvements in flash density alone may be roughly equivalent to the increase in demand for data storage.

However, the share of flash-based storage in overall storage sales is expected to significantly rise as SSDs continue to overtake slower HDDs in cloud and enterprise environments [13, 58] and users increasingly switch to high-capacity smartphones [59]. The frequent replacement rate of personal devices (See §2.3) will only exacerbate demand for more flash production. We therefore conclude that **flash bit production will have to expand significantly beyond the industry’s projected growth in flash density.** This expansion will in turn substantially increase the overall carbon footprint of flash storage.

Finally, we consider the role of emissions-related costs for flash storage. CO₂ emissions by industry are increasingly taxed through carbon credit schemes where manufacturers must compensate for their related emissions [60], e.g. European Union prices have recently peaked at \$111/CO₂e ton and are expected to continue rising [61]. Most flash manufacturing is currently located in countries with nascent, cheaper, carbon credit schemes [62, 63], effectively absolving flash production from pollution-related costs. Eventually, these countries will likely increase carbon credit costs to more realistic levels[64]. Coupled with the continuous drop of flash

prices we conclude that **carbon-related direct costs may soon become a major factor in the flash storage market.** For example, QLC SSD prices have recently gone as low as 45\$/TB [65]. At current levels the aforementioned EU carbon credits would comprise a 40% price increase (assuming 0.16 CO₂e Kg per 1GB [8]).

4 EFFECTIVELY USING FLASH STORAGE

4.1 Capacity and Density Tradeoff

To use flash more efficiently we propose to focus on solutions that stave off demand for more flash production. Compromising on device capacities straightforwardly curbs the carbon emissions of storage but substantially reduces its utility. Instead, we propose to optimize production efficiency for the same capacity. For enterprise storage providers restrictions on the rate of new data production, storage capacity, or performance require dramatic changes in their business model, changes which are societally and economically difficult to implement. Personal data on the other hand constitutes the target of most flash bit production nowadays and can be more easily curtailed. Furthermore, data in such devices is more malleable in nature, since it is mostly composed of unstructured data of varying types and importance [66–68] (e.g., media files). We therefore focus on unstructured data in personal storage, i.e. consumer and mobile devices.

SOS wholly adopts denser flash memories in personal storage devices. We propose replacing currently used TLC for a split PLC/pseudo-QLC scheme. Improving TLC density by 33% (QLC) and 66% (PLC) yields 50% improvement in density for the same capacity. This in turn utilizes raw materials more efficiently and increases flash sustainability accordingly.

Switching to high-density memories trades flash device lifetime for increased sustainability. Endurance of early PLC generations will likely reduce by almost a factor of 6-10 versus TLC [22], and a factor of 2 versus QLC. However, switching to low-grade flash should not necessarily cause premature storage device wear out as even the lifespan of existing TLC flash memories exceeds that of personal devices under typical user workloads by an order of magnitude (§2.3). Nevertheless, to further minimize the likelihood of data loss due to premature PLC wear SOS uses data degradation in capacity-restrained low-endurance devices through a combination of several mechanisms, which we now detail.

4.2 Selective Data Degradation

We propose a lean co-design of the storage device and host system to facilitate an intra-SSD hierarchical data management scheme for personal devices. Data is classified according to two factors (1) system functionality; and (2) user preferences. Our solution uses a machine-learning based file classifier (See §4.4) to arrange data according to two sets.

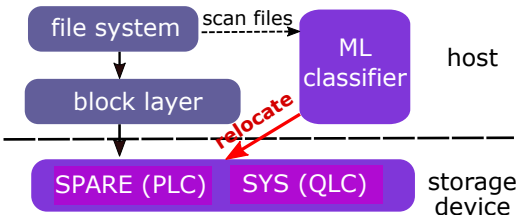


Figure 2: Design of SOS. A machine-learning mechanism periodically detects low-priority file data, which the device then moves to PLC memory.

The first set (SYS) stores *system files* related to the operating system, application metadata, libraries and executables and other files related to core functionality of the device. We further include critical personal information such as documents and media files with personal significance. The second set (SPARE) includes data classified as non-critical and read-dominant, which we expect to include mainly media content of relatively low significance to the user.

The device partitions the physical flash storage space into two physically separate sets of flash blocks with different data management decisions. The first set stores SYS files data which cannot be compromised. Therefore, these blocks are stored conservatively with additional redundancy (e.g. parity) on flash blocks with decreased density to ensure their reliability and integrity, i.e. pseudo-QLC [69].

The second set of flash blocks stores data of reduced importance for which users tolerate some degradation. To ameliorate the low endurance of the underlying flash media, these blocks are managed using approximate storage [70, 71]. In this scheme data is stored with weak protection (e.g., no ECC) assuming that applications can tolerate the implications of increased error rates over time (due to retention and endurance errors). For example, error-tolerant frames, which compose most data in MPEG files, can be approximately stored over flash with low quality loss while significantly increasing flash lifetime [72]. Notably, media files comprise over half of mobile storage data [66–68] and are rarely updated. Therefore, we expect that the low-endurance of PLC flash used for the SPARE block set will suffice for the read-dominant, update-infrequent nature of stored files as most writes will be directed at files stored on high-endurance flash.

Nevertheless, we acknowledge that files of *personal significance* should be managed with stricter guarantees. Therefore, straightforwardly classifying files of certain types (i.e., media) as non-critical according to type is insufficient. Consequently, SOS uses machine-based classification to minimize risking files of personal value. However, we believe most media files on personal devices are not of high value to users and may be identified as such with high probability. We therefore expect most media files to be categorized to the SPARE partition and slightly degraded over PLC flash. Conservatively assuming each partition takes up about half of the device

storage, SOS would result in a 50% and 10% capacity gain over using TLC or QLC memory, correspondingly.

We will further investigate adjustments to existing file systems and applications to allow additional file formats to be stored approximately, in order to increase the applicability of SOS. For example, a bank app is likely less tolerant to degradation in its related files than a social media app.

4.3 Flexible Flash Management

Approximate storage extends the lifespan of relevant flash blocks. However, some low-endurance PLC blocks may still excessively wear due to accumulated read, write, and retention errors. Therefore, such form of storage increases the risk of data loss. The SOS data classification mechanism will strive to minimize critical data loss due to being stored on such high-risk blocks by erring on the side of caution. Moreover, since data in the SPARE partition is infrequently updated severe data degradation will likely be extremely rare in SOS. Finally, we note that currently many users backup data from personal devices in the cloud (often stored in “cold” storage over HDDs). SOS can opportunistically take advantage of such backups by amending overly degraded local data copies through a cloud-backed copy. However, SOS does not inherently rely on the existence of such redundant copies.

Nevertheless, to address this eventuality SOS takes several measures. First, SOS relies on auto-delete data classifiers (See §4.5), which can predict user file deletion decisions with high accuracy (e.g., 79% [68]). Second, preemptively moving data to reduce wear variance between blocks is disabled on the SPARE partition since it effectively shortens overall block lifetime [73]. On the other hand, whenever possible, SOS preemptively moves data whose quality is dangerously degraded from worn-out blocks, which can no longer reliably store data. SOS will then mark worn-out zones/segments as unusable. Consequently, the capacity of the device may eventually slowly reduce and the host file system will be modified accordingly to tolerate capacity-variance [74]. Notably, the UFS mobile storage device standard, used in many Android phones, already supports optional LUNs with varying reliability during power failures as well as dynamic device capacity to extend device lifetime [75]. We further propose to flexibly resuscitate worn-out PLC blocks with reduced density [76], e.g. pseudo-TLC.

Technically, classification information is sent to the storage device for each stored data block. Managing data of different classes may be performed solely by firmware using LBA hints from the host. Alternatively, the device can manage data cooperatively with the host OS through SSD-specific abstractions, such as multi-stream [77] or zoned [78] interfaces, where the host is responsible for placing data blocks in relevant streams/zones with different managements policies.

4.4 Machine-driven Data Classification

As the volume and number of files grow on users devices and remote storage services, managing them becomes difficult. For example, the Samsung S22 device has up to 1TB capacity, which can potentially store over 250K images. Manually managing such volumes of data is not feasible for most users.

To efficiently manage personal storage spaces with minimal manual interference SOS employs a machine-learning based classifier to identify and automatically transition files to lower quality storage. The mechanism operates in the background as a privileged system daemon, which performs a periodic review (e.g., daily) of new file data.

For training, the classifier will use data collected from a large pool of previously scanned users files. Identification of critical system data can be performed by experts according to name conventions, file locations, and file content. For example, OS files are easily identifiable as critical to device operation. As for user-generated data, user files are prioritized according to significance and tolerance for varying levels of data degradation. For example, old videos with work colleagues can usually be classified as low-priority.

Generally speaking, determining priority of media files likely requires inspecting visual elements to determine significance using known traits (e.g., sensitive photos, family members). For other file types, such as documents, classification will similarly rely on file attributes [68], as well as known keywords in content. We plan to periodically re-evaluate user preferences as these tend to change over time [68, 79]. We will further investigate ways to partially integrate user input into the classification process without burdening users with frequent manual file inspection (e.g., prompting users for general preferences on device setup).

Technically, we propose that new file data will first be written to high-endurance pseudo-QLC memory. Once the classifier processes a file's data and deems some of the data as non-critical, the classifier instructs the storage device to move relevant low-priority data to PLC memory. As updates to low-priority data are expected to be infrequent by definition we believe the additional write overhead to pseudo-QLC memory is tolerable. Figure 2 illustrates the design of SOS.

4.5 Implications

Data loss. Under exceptionally write-intensive workloads some PLC flash blocks may prematurely wear out, forcing SOS to trim the amount of data stored on the device to retain functionality. In this case SOS temporarily transforms its data degradation scheme to automatically *delete* data by adapting existing schemes for cloud storage or proposing deletion recommendations to users [68, 79, 80]. Either way, once enough space (e.g. 3% of capacity) has been freed, SOS will return to perform regular data degradation only.

Performance. PLC access speeds will likely be worse than those of less dense memories. However, the performance and endurance of recent QLC generations matches that of early generation TLC memories [81]. Consequently, QLC may also be introduced in mobile and enterprise setups [16, 82]. SOS uses PLC to store low-priority data, mostly accessed using large sequential reads for which personal storage devices perform well [38]. Existing PLC SSDs are designated for similarly sequentially-accessed nearline storage [14]. Furthermore, SOS introduces error tolerance for degraded data which can further reduce read times. We therefore conclude that PLC access speeds will likely suffice to the needs of SOS.

Security. Successful classification requires preliminary training on datasets collected from as many users as possible. However, state-of-the-art shows that user behaviors with regards to potential data loss by automatic curating can significantly vary [80]. Consequently, to optimally manage users data SOS must continuously track and monitor user behavior and file content (e.g., family photos). Many users may deem such tracking as too invasive. We plan to investigate the effect of less-pervasive tracking of user behavior on the accuracy of our proposed data management mechanism.

5 RELATED WORK

Data reduction methods (e.g., compression) often used in enterprise storage are less effective in personal storage [66, 67, 83–85]. Alternatively, moving data from underutilized personal flash devices to shared storage [8] is costly and requires high-speed, high-availability mobile network infrastructure.

Others proposed improving sustainability by moving data between different types of devices (i.e., HDDs and SSDs) to optimize the carbon emissions of systems and workloads [8, 86]. However, such solutions are mostly applicable to shared and enterprise storage (e.g., cloud).

Several studies [87–89] have investigated re-purposing of old smartphones by grouping them into small computing clusters. This approach offers a sustainable, energy-efficient, and cost-effective alternative to conventional server-based cloud computing nodes. However, the commercial potential of these solutions is unclear due to their inferior performance, as well as reliance on faulty hardware.

ACKNOWLEDGMENTS

We thank Swamit Tannu and the anonymous reviewers for their insightful comments on earlier drafts of the work. This research was supported by a grant from the United States-Israel Binational Science Foundation (BSF), Jerusalem, Israel, and the United States National Science Foundation (NSF).

REFERENCES

- [1] Robert U Ayres. Life cycle analysis: A critique. *Resources, conservation and recycling*, 14(3-4):199–223, 1995.
- [2] Udit Gupta, Mariam Elgamil, Gage Hills, Gu-Yeon Wei, Hsien-Hsin S. Lee, David Brooks, and Carole-Jean Wu. ACT: Designing sustainable computer systems with an architectural carbon modeling tool. In *ACM Annual International Symposium on Computer Architecture*, ISCA, 2022.
- [3] Udit Gupta, Young Geun Kim, Sylvia Lee, Jordan Tse, Hsien-Hsin S Lee, Gu-Yeon Wei, David Brooks, and Carole-Jean Wu. Chasing carbon: The elusive environmental footprint of computing. *IEEE Micro*, 42(4):37–47, 2022.
- [4] Erik Brunvand, Donald Kline, and Alex K Jones. Dark silicon considered harmful: A case for truly green computing. In *IEEE International Green and Sustainable Computing Conference*, IGSC, 2018.
- [5] Prashant Nagapurkar and Sujit Das. Economic and embodied energy analysis of integrated circuit manufacturing processes. *Sustainable Computing: Informatics and Systems*, 35:100771, 2022.
- [6] Apple environmental progress report. <https://www.apple.com/environment/>, 2022. Accessed: Jan 2023.
- [7] Samsung Electro-Mechanics. 2021-22 sustainability report. https://m.samsungsem.com/resources/file/global/sustainability/report/SEM_SR2021_EN.pdf, 2022. Accessed: Jan 2023.
- [8] Swamit Tannu and Prashant J Nair. The dirty secret of SSDs: Embodied carbon. In *Workshop on Sustainable Computer Systems Design and Implementation*, HotCarbon, 2022.
- [9] Apple product environmental report iphone 14. https://www.apple.com/environment/pdf/products/iphone/iPhone_14_PER_Sept2022.pdf, 2022. Accessed: Jan 2023.
- [10] Blocks & Files. Disk drives will still store more than half of the world's data in 2024. <https://blocksandfiles.com/2020/05/14/idc-disk-drives-will-store-over-half-world-data-in-2024/>, May. 2020. Accessed: Jan 2023.
- [11] Forbes. 2022 flash memory summit announcements. <https://www.forbes.com/sites/tomcoughlin/2022/08/13/2022-flash-memory-summit-announcements/?sh=2ffa73a11bf0>, Aug. 2022. Accessed: Jan 2023.
- [12] The World Bank. CO2 emissions (metric tons per capita). <https://data.worldbank.org/indicator/EN.ATM.CO2E.PC>, May. 2020. Accessed: Jan 2023.
- [13] R Fontana and G Decad. The 2018 storage landscape-an 11 year perspective (2008-2019): LTO tape media HDD NAND, 2018.
- [14] Tom's Hardware. Solidigm Introduces Industry-First PLC NAND for Higher Storage Densities. <https://www.tomshardware.com/news/solidigm-plc-nand-ssd>, 2022. Accessed: Jan 2023.
- [15] Tech Insights. Upcoming new 3D NAND TLC devices: Samsung 176l & 238l, sk hynix 176l, kioxia/wd 162l. <https://www.techinsights.com/blog/upcoming-new-3d-nand-tlc-devices-samsung-176l-238l-sk-hynix-176l-kioxia/wd-162l>, 2022. Accessed: Jan 2023.
- [16] KIOXIA advances development of UFS ver. 3.1 embedded flash memory devices with QLC technology. <https://americas.kioxia.com/en-us/business/news/2022/memory-20220119-1.html>, 2022. Accessed: Jan 2023.
- [17] Akira Goda. Recent progress on 3D NAND flash technologies. *Electronics*, 10(24):3156, 2021.
- [18] Jeongdong Choe. Comparison of 20 nm & 10 nm-class 2D Planar NAND and 3D V-NAND Architecture. Flash Memory Summit, 2015. Accessed: Jan 2023.
- [19] ANANDTech. Micron: Shipments of 3D QLC for SSDs Nearly Double QoQ as Wafer Starts Cut Again. <https://www.skhynix.com/pr/pressReleaseView.do/?seq=2793&offset=1>, 2019. Accessed: Jan 2023.
- [20] Rino Micheloni, Luca Crippa, Cristian Zambelli, and Piero Olivo. Architectural and integration options for 3D NAND flash memories. *Computers*, 6(3), 2017.
- [21] Laura M Grupp, John D Davis, and Steven Swanson. The bleak future of NAND flash memory. In *USENIX Conference on File and Storage Technologies*, FAST, 2012.
- [22] Andromachi Chatzieleftheriou, Ioan Stefanovici, Dushyanth Narayanan, Benn Thomsen, and Antony Rowstron. Could cloud storage be disrupted in the next decade? In *Proceedings of the 12th USENIX Conference on Hot Topics in Storage and File Systems*, HotStorage, 2020.
- [23] Kioxia. How 3D flash memory stacks up. <https://americas.kioxia.com/content/dam/kioxia/en-us/business/memory/asset/Electronic-Design-FAQ-KIOXIA.pdf>, 2020. Accessed: Jan 2023.
- [24] TechRadar. 1000tb SSDs could become mainstream by 2030 as samsung plans 1000-layer NAND. <https://www.techradar.com/news/1000tb-ssds-could-become-mainstream-by-2030-as-samsung-plans-1000-layer-nand>, 2022. Accessed: Jan 2023.
- [25] Cristian Zambelli, Rino Micheloni, and Piero Olivo. Reliability challenges in 3D NAND flash memories. In *IEEE International Memory Workshop*, IMW. IEEE, 2019.
- [26] Semiconductor Engineering. 3D NAND's vertical scaling race. <https://semiengineering.com/3d-nands-vertical-scaling-race/>, 2020. Accessed: Jan 2023.
- [27] K Parat and A Goda. Scaling trends in NAND flash. In *IEEE International Electron Devices Meeting*, IEDM, 2018.
- [28] Alessandro S Spinelli, Christian Monzio Compagnoni, and Andrea L Lacaita. Reliability of NAND flash memories: Planar cells and emerging issues in 3d devices. *Computers*, 6(2):16, 2017.
- [29] Samsung Support. Consumer storage warranty. <https://semiconductor.samsung.com/consumer-storage/support/warranty/>. Accessed: Jan 2023.
- [30] Hynix SSDs. SSD warranty. <https://ssd.skhynix.com/warranty/>. Accessed: Jan 2023.
- [31] Stathis Maneas, Kaveh Mahdavian, Tim Emami, and Bianca Schroeder. Operational characteristics of SSDs in enterprise storage systems: A large-scale field study. In *USENIX Conference on File and Storage Technologies*, FAST, 2022.
- [32] Riccardo Pincioli, Lishan Yang, Jacob Alter, and Evgenia Smirni. The life and death of SSDs and HDDs: Similarities, differences, and prediction models. arXiv preprint, 2020.
- [33] Samsung UK. Memory card warranty statement. <https://www.samsung.com/uk/support/memory-card-warranty/>. Accessed: Jan 2023.
- [34] Western Digital. Sandisk product warranty periods. https://support-en.wd.com/app/answers/detailweb/a_id/48391. Accessed: Jan 2023.
- [35] Huawei. Warranty policy. <https://consumer.huawei.com/uk/support/warranty-policy/>. Accessed: Jan 2023.
- [36] Apple one year limited warranty. <https://www.apple.com/legal/warranty/products/ios-warranty-document-us.html>, 2023. Accessed: Jan 2023.
- [37] Samsung inc. Warranty information. <https://www.samsung.com/uk/support/warranty/>. Accessed: Jan 2023.
- [38] Tao Zhang, Aviad Zuck, Donald E Porter, and Dan Tsafir. Apps can quickly destroy your mobile's flash: why they don't, and how to keep it that way. In *Annual International Conference on Mobile Systems, Applications, and Services*, MobiSys, 2019.
- [39] Thomas Alsop. Global NAND bit memory market share 2020, by application. <https://www.statista.com/statistics/553338/worldwide-nand-memory-bit-demand-distribution/>, Sep. 2022. Accessed: Jan 2023.

- [40] Shujie Han, Patrick PC Lee, Fan Xu, Yi Liu, Cheng He, and Jiongzhou Liu. An in-depth study of correlated failures in production SSD-based data centers. In *USENIX Conference on File and Storage Technologies*, FAST, 2021.
- [41] Lotfi Belkhir and Ahmed Elmelig. Assessing ICT global emissions footprint: Trends to 2040 & recommendations. *Journal of cleaner production*, 177:448–463, 2018.
- [42] Everphone. What is the average smartphone lifespan? <https://everphone.com/en/blog/smartphone-lifespan/>. Accessed: Jan 2023.
- [43] Harald Wieser and Nina Troger. Exploring the inner loops of the circular economy: Replacement, repair, and reuse of mobile phones in Austria. *Journal of Cleaner Production*, 172:3042–3055, 2018.
- [44] Ars Technica. Why big tech shreds millions of storage devices it could reuse. <https://arstechnica.com/information-technology/2022/10/why-big-tech-shreds-millions-of-storage-devices-it-could-reuse/>. Accessed: Jan 2023.
- [45] Medium.com. <https://medium.com/geekculture/modular-smartphones-far-from-reality-2f8b5dd4263f>, 2021. Accessed: Jan 2023.
- [46] Fairphone. <https://www.fairphone.com/en/>, 2023. Accessed: Jan 2023.
- [47] Ping Chi, Shuangchen Li, Yuanqing Cheng, Yu Lu, Seung H. Kang, and Yuan Xie. Architecture design with STT-RAM: Opportunities and challenges. In *Asia and South Pacific Design Automation Conference*, ASP-DAC, 2016.
- [48] Jim Handy. Understanding the intel micron 3DX point memory. Storage Developer Conference 2015. Accessed: Jan 2023.
- [49] TechTarget. Understand the intel optane shutdown. <https://www.techtarget.com/searchstorage/opinion/Understand-the-Intel-Optane-shutdown>, Aug. 2022. Accessed: Jan 2023.
- [50] Sarah Boyd, Arpad Horvath, and David Dornfeld. Life-cycle assessment of NAND flash memory. *IEEE Transactions on Semiconductor Manufacturing*, 24(1):117–124, 2011.
- [51] Statista. NAND flash factories by country 2020. <https://www.statista.com/statistics/816061/nand-flash-factories-countries/>, 2020. Accessed: Jan 2023.
- [52] International Energy Agency. Korea renewable energy 3020 plan. <https://www.iea.org/policies/6569-korea-renewable-energy-3020-plan>, 2020. Accessed: Jan 2023.
- [53] Carbon Brief. What does china’s new paris agreement pledge mean for climate change? <https://www.carbonbrief.org/qa-what-does-chinas-new-paris-agreement-pledge-mean-for-climate-change/>, Dec. 2021. Accessed: Jan 2023.
- [54] International Energy Agency. Japan 2021 energy policy review. <https://www.iea.org/reports/japan-2021>, 2021. Accessed: Jan 2023.
- [55] IDC. Data age 2025. <https://www.seagate.com/files/www-content/our-story/trends/files/idc-seagate-data-age-whitepaper.pdf>, Nov. 2018. Accessed: Jan 2023.
- [56] Petroc Taylor. Amount of data created, consumed, and stored 2010–2020, with forecasts to 2025. <https://www.statista.com/statistics/871513/worldwide-data-created/>, Sep. 2020. Accessed: Jan 2023.
- [57] Luca Fasoli. Enabling new markets through flash storage innovation. <https://www.youtube.com/watch?v=dmnFL3Q7B7o&t=62s>, 2020.
- [58] Techradar. SSDs could squeeze hard drives out the data center sooner than you think. <https://www.techradar.com/news/ssds-could-squeeze-hard-drives-out-the-data-center-sooner-than-you-think>, Feb. 2022. Accessed: Jan 2023.
- [59] Number of smartphone subscriptions worldwide from 2016 to 2021, with forecasts from 2022 to 2027. <https://www.statista.com/statistics/330695/number-of-smartphone-users-worldwide/>, 2023. Accessed: Jan 2023.
- [60] Ember. Eu carbon price tracker. <https://ember-climate.org/data/data-tools/carbon-price-viewer/>. Accessed: Jan 2023.
- [61] CarbonCredits. Left unchecked - the carbon price goes to infinity. <https://carboncredits.com/eu-ets-carbon/>, Jan. 2022. Accessed: Jan 2023.
- [62] Energy Monitor. Carbon trading the chinese way. <https://www.energymonitor.ai/policy/carbon-markets/carbon-trading-the-chinese-way/>, Jan. 2022. Accessed: Jan 2023.
- [63] Ltd. Korea Investment & Securities Co. Korean ets market review. International Emissions Trading Association Conference, Sep. 2022. Accessed: Jan 2023.
- [64] UBS Bank. China’s carbon trading: a fast-emerging rmb500bn market in the race to net zero. <https://www.ubs.com/global/en/investment-bank/in-focus/2022/china-carbon-trading.html>, 2022. Accessed: Jan 2023.
- [65] Amazon. Intel 670p series m.2 2280 2tb ssd. <https://www.amazon.com/dp/B08X4XL71S?th=1>, 2021. Accessed: Apr. 2023.
- [66] Cheng Ji, Li-Pin Chang, Liang Shi, Congming Gao, Chao Wu, Yuangang Wang, and Chun Jason Xue. Lightweight data compression for mobile flash storage. *ACM Transactions on Embedded Computing Systems*, 16(5s), sep 2017.
- [67] Miao-Chiang Yen, Shih-Yi Chang, and Li-Pin Chang. Lightweight, integrated data deduplication for write stress reduction of mobile flash storage. *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, 37(11):2590–2600, 2018.
- [68] Mohammad Taha Khan, Christopher Tran, Shubham Singh, Dimitri Vasilkov, Chris Kanich, Blase Ur, and Elena Zheleva. Helping users automatically find and manage sensitive, expendable files in cloud storage. In *USENIX Security Symposium*, 2021.
- [69] Jaeyong Bae, Jaehyung Park, Yuhun Jun, and Euseong Seo. Dedup-for-speed: Storing duplications in fast programming mode for enhanced read performance. In *ACM International Conference on Systems and Storage*, SYSTOR, 2022.
- [70] Adrian Sampson, Jacob Nelson, Karin Strauss, and Luis Ceze. Approximate storage in solid-state memories. *ACM Transactions on Computer Systems*, 32(3), 2014.
- [71] Qiao Li, Liang Shi, Jun Yang, Youtao Zhang, and Chun Jason Xue. Leveraging approximate data for robust flash storage. In *ACM/IEEE Design Automation Conference*, DAC, 2019.
- [72] Yongwoo Lee, Jaehyun Park, Junhee Ryu, and Younghyun Kim. Axfl: Exploiting error tolerance for extending lifetime of NAND flash storage. *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, 39(11):3239–3249, 2020.
- [73] Ziyang Jiao, Janki Bhimani, and Bryan S. Kim. Wear leveling in SSDs considered harmful. In *ACM Workshop on Hot Topics in Storage and File Systems*, HotStorage, 2022.
- [74] Bryan S. Kim, Eunji Lee, Sungjin Lee, and Sang Lyul Min. CPR for SSDs. In *ACM Workshop on Hot Topics in Operating Systems*, HotOS, 2019.
- [75] JEDEC. Universal flash storage (ufs) standard. <https://www.jedec.org/standards-documents/focus/flash/universal-flash-storage-ufs>, 2020. Accessed: Jan 2023.
- [76] Sungjin Lee, Keonsoo Ha, Kangwon Zhang, Jihong Kim, and Junghwan Kim. FlexFS: A flexible flash file system for MLC NAND flash memory. In *USENIX annual technical conference*, ATC, 2009.
- [77] Janki Bhimani, Jingpei Yang, Zhengyu Yang, Ningfang Mi, NHV Krishna Giri, Rajinikanth Pandurangan, Changho Choi, and Vijay Balakrishnan. Enhancing SSDs with multi-stream: What? why? how? In *IEEE International Performance Computing and Communications Conference*, IPCCC, 2017.
- [78] Theano Stavrinou, Daniel S Berger, Ethan Katz-Bassett, and Wyatt Lloyd. Don’t be a blockhead: zoned namespaces make work on conventional SSDs obsolete. In *Proceedings of the Workshop on Hot Topics in Operating Systems*, HotOS, 2021.

- [79] Kopo Marvin Ramokapane, Jose Such, and Awais Rashid. What users want from cloud deletion and the information they need: A participatory action study. *ACM Transactions on Privacy and Security*, 26(1), nov 2022.
- [80] Francesco Vitale, William Odom, and Joanna McGrenere. Keeping and discarding personal data: Exploring a design space. In *Designing Interactive Systems Conference*, DIS, 2019.
- [81] Yan Li. 3D NAND memory and its application in solid-state drives: Architecture, reliability, flash management techniques, and current trends. *IEEE Solid-State Circuits Magazine*, 12(4):56–65, 2020.
- [82] Micron 5210 ION enterprise SATA qlc SSD. https://www.micron.com/-/media/client/global/documents/products/product-flyer/5210_ion_ssd_product_brief.pdf?la=en, 2020. Accessed: Jan 2023.
- [83] Aviad Zuck, Sivan Toledo, Dmitry Sotnikov, and Danny Harnik. Compression and SSDs: Where and how? In *Workshop on Interactions of NVM/Flash with Operating Systems and Workloads*, INFLOW, 2014.
- [84] Xuebin Zhang, Jiangpeng Li, Hao Wang, Kai Zhao, and Tong Zhang. Reducing solid-state storage device write stress through opportunistic in-place delta compression. In *USENIX Conference on File and Storage Technologies*, FAST, 2016.
- [85] Aayush Gupta, Raghav Pisolkar, Bhuvan Uргаonkar, and ANAND Sivasubramaniam. Leveraging value locality in optimizing NAND flash-based SSDs. In *USENIX Conference on File and Storage Technologies*, FAST, 2011.
- [86] Thomas E. Anderson, Adam Belay, Mosharaf Chowdhury, Asaf Cidon, and Irene Zhang. Treehouse: A case for carbon-aware datacenter software. *CoRR*, abs/2201.02120, 2022.
- [87] Stavros Harizopoulos and Spiros Papadimitriou. A case for micro-cellstores: Energy-efficient data management on recycled smartphones. In *Proceedings of the Seventh International Workshop on Data Management on New Hardware*, DaMoN, 2011.
- [88] Mohammad Shahradsad and David Wentzlaff. Towards deploying decommissioned mobile devices as cheap Energy-Efficient compute nodes. In *9th USENIX Workshop on Hot Topics in Cloud Computing*, HotCloud, 2017.
- [89] Jennifer Switzer, Gabriel Marcano, Ryan Kastner, and Pat Pannuto. Junkyard computing: Repurposing discarded smartphones to minimize carbon. In *Proceedings of the 28th ACM International Conference on Architectural Support for Programming Languages and Operating Systems, Volume 2*, ASPLOS, 2023.